

Monochrome LCD Position Indicator

Applications:

- Car position indicator on car operating panel
- Hall position indicator on hall landings
- Ideal for modernization



Benefits:

- Compact and slim design
- Standard lift information and message* display
- Portrait / landscape view
- Date / time display*
- Economical LCD solution


*Message and date/time display only for FS0545 series
** Pictures for illustration only




FS0270



FS0545

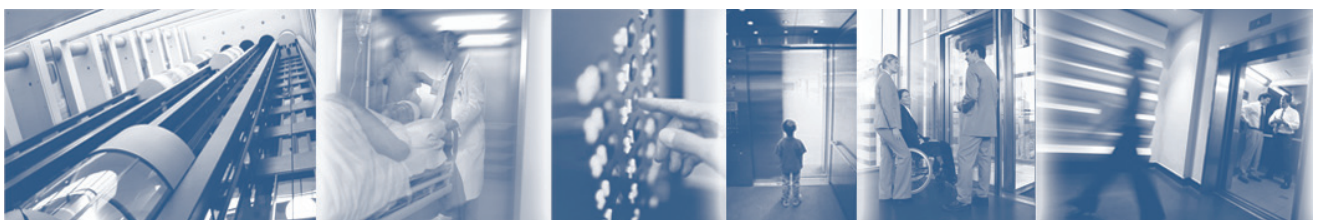

SYSTEM ARCHITECTURE

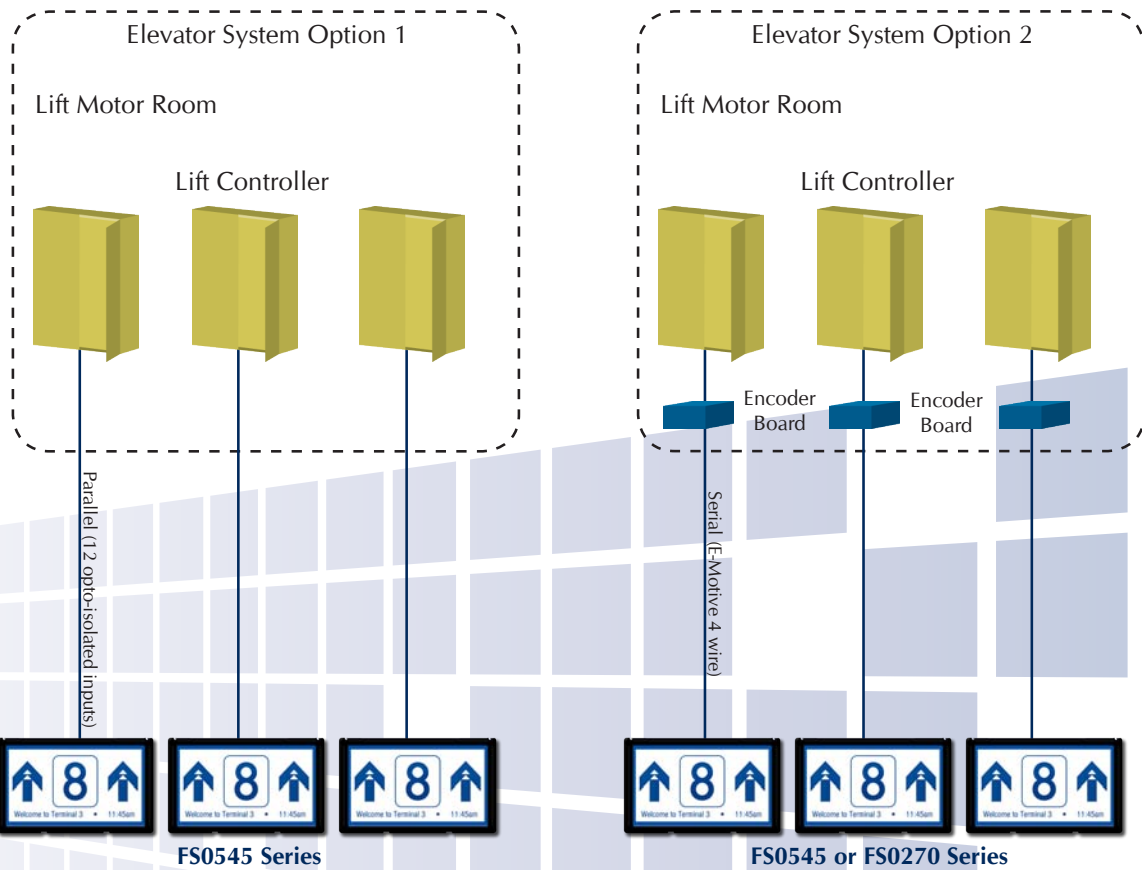

* Pictures for illustration only

GENERAL SPECIFICATIONS	FS0545 SERIES	FS0270 SERIES
Supply Voltage (VDC)	24V	24V
Supply Voltage (VAC)	18V	18V
Supply Current @ 24V DC (mA)	190	100
Signal Voltage, DC (opto isolated input type) (VDC)	24V	-
Signal Current, DC (opto isolated input type) (mA)	20	-
Operating Free-air Temperature Range (°C)	0 to 50	0 to 50
Storage Temperature Range (°C)	-10 to 60	-10 to 60
Humidity (% RH)	10 to 90 (non condensing)	10 to 90 (non condensing)
Interface ¹	Parallel (12 opto-isolated inputs) / Serial (E-Motive 4 wire)	Serial (E-Motive 4 wire)
Display Type Monochrome	Blue / White, White / Blue	Blue / White
Viewing Area (W x H) (mm)	120 x 64	64 x 32
Overall Display Dimension (W x H x D) (mm)	170 x 103.5 x 41	112 x 70 x 18.8
Resolution (X x Y)	240 x 128	128 x 64

* Specifications are subject to change

¹ Serial interface to different lift controllers is done through E-Motive encoder boards that are sold separately.



Corporate Offices:
 TL Jones Asia Pacific Pte Ltd
 Singapore +65 6776 4111
 www.tljones.com
 E-Motive Display Pte Ltd
 Singapore +65 6776 4111
 www.emotivedisplay.com

Regional Sales Offices:
 Australia (call free) 1 800 886 889
 Japan +81 3 5847 8329
 New Zealand +64 3 349 4456
 UAE +971 4 295 5648
 UK +44 1628 770 734
 USA +1 631 864 3699

China:
 Shanghai +86 21 6495 3748
 Guangzhou +86 20 8797 9936

India:
 Mumbai +91 22 4215 0700/1/2
 New Delhi +91 11 2553 7775

A HALMA COMPANY